
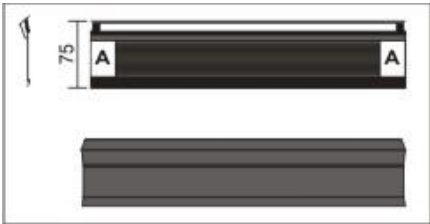


<b>PEL LED Step Light</b> <b>Auditorium Series, Mounting : Floor Edge, (Type – Non Emergency)</b>	
<b>PHOTOGRAPH OF FITTING</b> 	<p>A step edge mounting fitting, continuously remains <b>ON</b>, on mains power supply through a S. M. P. S., also provides illumination on step's inner edge.</p>
<b>Dimensions (in mm)</b> 	
TECHNICAL SPECIFICATIONS	
Confirms	IS : 9583 – 1981.
Ingress Protection	IP – 20.
Housing	Made up well defined extruded aluminum alloy provided with anti skid narrow ribbed high density rubber extrusion.
Paint & Colour	Epoxy polyester powder coating, <b>BLACK</b> in colour.
Diffuser	Well grooved acrylic rod to provide eye soothing uniform low glow to not to disturb the audience during the show in the darkness.
Input (V)	12 Volts, D. C.
Lamp	L. E. D.
Mounting	On the edge of the step thru 2/4 Nos. of holes.
<b>Weight (Kg)</b>	
Application	Commercial purpose, staircase of hotels, auditorium, dark corridors, underground parking.
Tolerance on overall dimensions is $\pm 5$ m. m. unless otherwise specified.	
Please Note: Other Input Voltage Is Also Available – Price On Request (POR).	
Due to continuous development, specifications may change without prior notice.	

FOR,

**PROLITE AUTOGLO LIMITED**