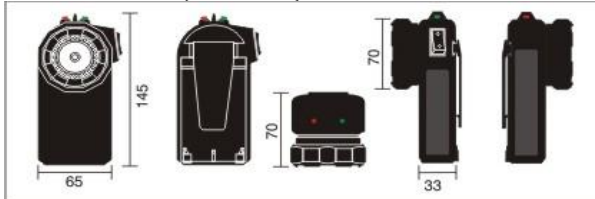


PEL LED SIGNALING TORCH

An impact resistant, robust, hand held signaling torch made of ABS.

DIMENSIONS (IN M. M.)**TECHNICAL SPECIFICATIONS**

Paint Shade	Black
Body	ABS
Body Thickness	3 MM
Reflector	ABS/Polycarbonate
Reflector Thickness	1.2 MM
Ambient Temperature	-20° C to +50° C
Led Rating	21 Led x 0.12W
LED Type	
a) White to Red	(7 Nos.) 3 M. M.
b) White to Green	(7 Nos.) 3 M. M.
c) White to White	(7 Nos.) 3 M. M.
LUX Level at 1.5 m in 7 Led Mode	20 Lux.
LED Rating LUX Level at 1.5 m in Lamp Mode	10 M. M. LED, White to white 40 LUX
Nominal Working Voltage	4.5V DC.
Battery Backup	48 hrs for Led's Modes and 12 hrs for 10 M. M. LED for continuous "ON"
Battery Type Voltage	Dry Cell (D, Size 3 Cell) 1.5 Volt.
Mode Switch One (I) Switch Two (II) + Green Push Test + Red Push Test	10 M. M. LED ON 3 M. M. RED LED ON 3 M. M. Green LED ON 3 M. M. White LED ON
Total Weight Of Unit	350Gms. Approx.(with Battery)

FOR

PROLITE AUTOGLO LIMITED.