




Automatically Switches-ON mains power failure and provides illumination on battery source for specified duration, after which the battery gets automatically cut-off, to facilitate quick recharge on resumption of main supply. Once the battery is totally charged it automatically slides into trickle charge to constantly retain the charge and be ready for immediate use. **Non Maintained**

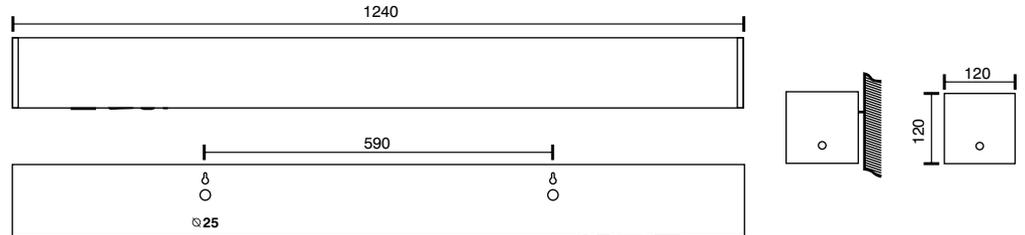

## PEL LED NM (1200)

DIMENSION (in mm)

## TECHNICAL SPECIFICATIONS

CONFORMS TO		IS - 10322
INGRESS PROTECTION		IP 20.
HOUSING		22 MS C.R.C.A. FABRICATED
PAINT & COLOUR		EPOXY POLYESTER POWDER COATING, WHITE IN COLOUR.
DIFFUSER		OPAL
INPUT (V)		~ 230 VOLTS, 50 HZ; ±10%.
LED		MULTIPLE LEDs, HIGH LUMEN OUTPUT, 40 WATT
LED MAKE		EDISON, OSRAM
BATTERY TYPE		SLA RECHARGEABLE
DURATION		180 MINUTES BACK UP; ±10%.
CHARGING TYPE		CONSTANT VOLTAGE CHARGER.
RECHARGING CYCLE		10 TO 12 HOURS RECHARGING PERIOD.
MOUNTING TYPE		ON WALL/ CEILING THROUGH 2 NO'S OF KEY HOLES
WEIGHT (KG)		5 KG. APPROX
INDICATIONS		1- RED LED "ON" INDICATES CHARGING.
APPLICATION		DOMESTIC & COMMERCIAL PURPOSE, CORRIDORS OF HOTELS, BATTERY ROOMS, STAIRCASES, UNDERGROUND PARKING.

*Tolerance on overall dimensions is ± 5 mm unless otherwise specified. | Please Note: Other Input Voltage Is Also Available – Price On Request (POR). | Due to continuous development, specifications may change without prior notice.*